Installation

The Hafny mirror fits onto the outside of handlebars with diameters from 21mm to 26mm.

1. Take the clamp piece out of the small white package.

A) 21~23.5 mm Handlebar

Place the entire piece of spacer insude of clamp

B) 23.5~25 mn Handlebar

Break spacer in half. Insert the half spacer into the clamp.

C) 25~26 mm Handlebar

No spacer needed.

2. Place the clamp next to the grip.

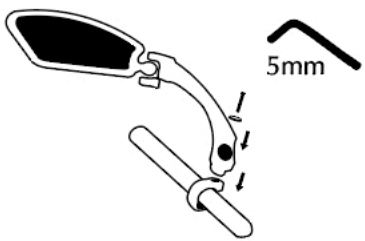

To get a better view, move your shifter inside, and install the mirror right next to the grip.

3. Go for a ride.



If the mirror doesn't stay in the place, tighten the screw between the mirror and the frame.

Cleaning Instructions:

Dust off the surface and wipe clean with a soft cloth.
For stainless steel lens users: Stainless steel lenses are slightly softer than glass lenses so it is important to dust off the surface before wiping to prevent scratches.